

CU 7150 4P / 2x4P F8 Multimedia

Data cable, S/FTP, Category 7_A, AWG22, Euroclass Dca



- 1 Inner conductor: AWG22 Bare copper wire
- 2 PE insulated conductor: 1.6 mm Ø
- 3 Screen (pair): Alu PETP foil
- 4 Overall screen: Tinned braided copper
- 5 Outer sheath: FRNC/LSOH



Description

Electrically and mechanically superior quality Cat.7A data cable - exceeds the requirements of ISO/IEC 11801, IEC 61156-5, IEC 61156-7, EN 50173-1 and EN 50288-9-1.

Excellent shielding effect due to individually screened pairs and overall copper braid.

Easy identification of wires thanks to longitudinal colour markings.

Compatible with all current connecting hardware in accordance with EN 50173 and ISO/IEC 11801.

Application

Data cable for structured premises cabling. For the transmission of digital and analogue voice, video and data signals.

Suitable for all ICT network applications up to class FA applications (1000 MHz) in accordance with EN 50173-1 and ISO/IEC 11801.

Optimized for the transmission of broadband signals (such as cable TV) in accordance with ISO/IEC 11801-4.

Due to the increased wire section eminently suited for Power over Ethernet PoE / PoE+ / 4PPoE up to 100W. Fully supports the application of HDBaseT (TM) Spec 1.0 and Spec 2.0


General Properties

Imprint	DATWYLER «cable type» «additional text» «batch number» «meter marks»
Installation temperature	0 °C - +50 °C
Operating temperature	-20 °C - +60 °C
Wire colour	white - blue/blue, white orange/orange, white green/green, white brown/brown in acc. with IEC 60189 and IEC 60708 (ring marked)

Electrical properties

Category	Cat.7 _A
Coupling attenuation	85 dB
Delay Skew	17 ns/100 m
EMC	shielded
Impedance at 100 MHz, ±5Ω	100 Ω
Loop resistance at 20°C	111 Ω/km
Near end unbalance attenuation LCL at 1-600 MHz	40 dB
NVP %	80
operating capacity	41 pF/m

Segregation class	d
Transfer impedance 1/10/30 MHz	< 5/5/8 mΩ/m

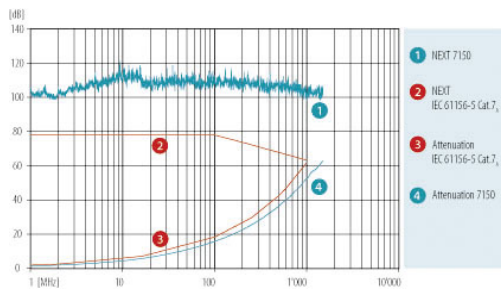

Frequency [MHz]	Category	Attenuation [dB]	NEXT [dB]	PS-NEXT [dB]	ACR-N [dB]	PS-ACR-N [dB]	ACR-F [dB]	Return Loss [dB]
1		1.7	103	100	101	98	110	26
4		3.2	103	100	100	97	108	30
10		4.9	103	100	98	95	106	33
100	5e	16.2	103	100	87	84	94	33
250	6	26	103	100	77	74	84	28
500	6 _A	38	98	95	60	57	71	26
600	7	40	96	93	56	53	66	25
862		49	92	89	43	40	58	24
1,000	7 _A	54	90	87	36	33	55	23
1,200	61156-7	58	85	82	27	24	46	23
1,500		68	80	77	12	9	41	20

Mechanical properties

Minimal crush resistance / 10cm	1,000 N
Minimum bending radius during installation	64 mm
Minimum bending radius permanently installed	32 mm
Minimum number of impacts	10
Solid / Flex	Solid wire
Tensile strength (2x4P)	260 N
Tensile strength (4P)	130 N

Standards

Cat./Class	Cat 7 _A / Class F _A - limit values as specified by IEC 61156-5, IEC 61156-7 and EN 50288-9-1 guaranteed
PoE	IEEE 802.3bt Type 4 (100W)
Reaction to fire (Euroclasses)	EN 13501-6
Zero halogen no corrosive gases	IEC 60754-1/-2, EN 60754-1/-2, VDE 0482-754-1/-2, AREI-RGIE Art.104-SA
Flame Propagation	IEC 60332-1-2, EN 60332-1-2, VDE 0482-332-1-2, AREI-RGIE Art.104-F1
Flame Spread	IEC 60332-3-24, EN 60332-3-24, AREI-RGIE Art.104-F2
Smoke Density	IEC 61034-1/-2, EN 61034-1/-2, VDE 0482-1034-1/-2, AREI-RGIE Art.104-SD

Versions

Material number	Product	Reaction To Fire	Dimensions n x p x [mm (AWG)]	Outer sheath colour	Outer sheath diameter [mm]	Outer sheath dimensions [mm]	CU rate [kg/km]	Weight [kg/km]	Fire load [kWh/m]	Packing unit
18292500DK	CU 7150 4P	Dca-s2,d1,a1	4 x 2 x 0.64 (AWG22)	orange	7.8		40.2	65	0.18	1000 m drum

Material number	Product	Reaction To Fire	Dimensions n x p x [mm (AWG)]	Outer sheath colour	Outer sheath diameter [mm]	Outer sheath dimensions [mm]	CU rate [kg/km]	Weight [kg/km]	Fire load [kWh/m]	Packing unit
18292500DL	CU 7150 4P	Dca-s2,d1,a1	4 x 2 x 0.64 (AWG22)	orange	7.8		40.2	65	0.18	500 m drum
18292600DL	CU 7150 2x4P	Dca-s2,d1,a1	2 x (4 x 2 x 0.64 (AWG22))	orange	16		80.4	131	0.36	500 m drum

Subject to technical modification

As of 2020-12-03 11:26:54