


FO Outdoor wbGGT SMALL / A-DQ(ZN)B2Y

Small, 2-layer Euroclass Fca

metal-free, dry interstices,

longitudinally watertight, rodent protection

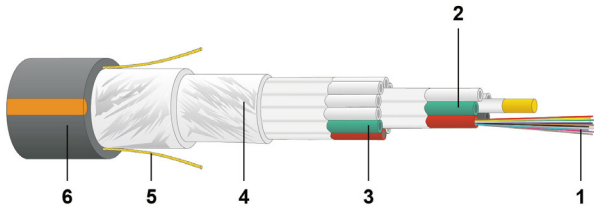

- 1 ≤ 24 fibres
- 2 Swelling tape
- 3 Loose tube
- 4 Glass armour
- 5 Ripcord
- 6 HDPE sheath



Description

Compact fibre optic outdoor cable with up to 432 fibres for city and access networks.
 2-layer loose tube construction, longitudinally water protected and with dry strand interstices.
 The glass armour provides for a combined non-metallic rodent protection and strain relief.
 The two coloured ripcords are easy to identify and enable the safe opening of the cable sheath.
 HDPE cable sheath, easy to lay.
 Direct burial.

Applicazione

Optimised for blowing into compact thermoplastic ducts.

Costruzione

Armatura (protezione per roditori)	rodent proof
Outer sheath material	PE

Proprietà generali

Impronta	DATWYLER «cable type» «Datwyler designation» «no. of fibres» «fibre type» «add. text» «batch no.» «meter marks»
Installation temperature	-10 °C - +50 °C
Integrità del circuito	No
Operating temperature	-20 °C - +70 °C
Storage temperature	-25 °C - +70 °C

Standards

Tensile performance	IEC 60794-1-21 E1
Crush resistance	IEC 60794-1-21 E3
Impact	IEC 60794-1-21 E6
Repeated bending	IEC 60794-1-21 E7
Torsion	IEC 60794-1-21 E11
Bend	IEC 60794-1-22 F5
Reaction to fire (Euroclasses)	EN 13501-6: F _{ca}
Zero halogen no corrosive gases	IEC 60754-1/-2, EN 60754-1/-2, VDE 0482-754-1/-2

Versions

Numero Materiale	Product	Reaction To Fire	Outer sheath colour	Fibre type	Diametro esterno della guaina [mm]	Raggio di curvatura [mm]	Weight [kg\km]	Tensile load [N]	Crush resistance short term [N]	Crush resistance continuous [N]	Fire load [kWh\m]	Packing unit
19261900FZ	FO Outdoor Small 18x24	Fca	nera	E9/125 G.652.D OS2	16	320	193	5.000	3.500	2.000	1,24	al metro

Con riserva di modifiche tecniche

A partire da 2021-03-31 14:22:19