


FO Universal wbGGFR Easy Blow / U-DQ(ZN)BH

Fire resistant, optimized for blowing, up to 288 fibres, Euroclass Eca
metal-free, dry interstices, rodent protection,
in accordance with IEC 60332.1 and IEC 60332.3 C



- 1 ≤ 24 fibres
- 2 Loose tube
- 3 Swelling tape
- 4 Glass armour
- 5 Ripcord
- 6 FR/LSOH sheath (black)

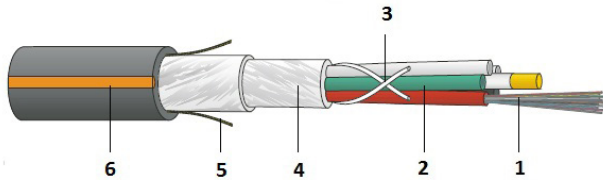

Description

Robust, metal-free fibre optic outdoor and indoor cable with stranded loose tubes.

Optimized for blowing through thermoplastic ducts:

Its good greasing characteristics, smooth and strong sheath surface and good internal strength provide for an axial linear motion and reduced friction (in comparison with standard indoor/outdoor cables).

Non-metallic rodent protection.

Flame retardant and fire resistant sheath (black) with very low fire load.

The coloured ripcords are easy to identify and enable the safe opening of the cable sheath.

Applicazione

For blowing through thermoplastic ducts with blowing lengths of up to 2000 m.

In Premises cabling for LAN backbones (Campus and Vertical/Riser cabling) as well as for tunnels.

Costruzione

Outer sheath material	FRNC/LSZH
-----------------------	-----------

Proprietà generali

Impronta	DATWYLER «cable type» «Datwyler designation» «DIN designation» «no. of fibres» «fibre type» «add. text» «batch no.» «meter marks»
Installation temperature	-10 °C - +50 °C
Integrità del circuito	No
Operating temperature	-25 °C - +70 °C
Storage temperature	-25 °C - +70 °C

Standards

Tensile performance	IEC 60794-1-21 E1
Crush resistance	IEC 60794-1-21 E3
Impact	IEC 60794-1-21 E4
Repeated bending	IEC 60794-1-21 E6
Torsion	IEC 60794-1-21 E7
Bend	IEC 60794-1-21 E11
Water penetration	IEC 60794-1-2 F5
Reaction to fire (Euroclasses)	EN 13501-6: E _{ca}
Zero halogen no corrosive gases	IEC 60754-1/-2, EN 60754-1/-2, VDE 0482-754-1/-2
Flame Propagation	EN 60332-1-2, IEC 60332-1-2, VDE 0482-332-1-2
Flame Spread	IEC 60332-3-24, EN 60332-3-24, VDE 0482-332-3-24
Smoke Density	IEC 61034-1/-2, EN 61034-1/-2, VDE 0482-1034-1/-2
Resistenza ai raggi UV	EN 50289-4-17

Versions

Numero Materiale	Product	Reaction To Fire	Outer sheath colour	Fibre type	Diametro esterno della guaina [mm]	Raggio di curvatura [mm]	Weight [kg\ km]	Tensile load [N]	Crush resistance short term [N]	Crush resistance continuous [N]	Fire load [kWh/m]	Packing unit
19060200EZ	FO Universal Easy Blow 1x12	Eca	nera	E9/125 G.652.D OS2	12	180	166	9.000	5.000	3.000	0,627	al metro
19021500EZ	FO Universal Easy Blow 2x12	Eca	nera	E9/125 G.652.D OS2	12	180	166	9.000	5.000	3.000	0,627	al metro
19215600EZ	FO Universal Easy Blow 2x12	Eca	nera	G50/125 OM3	12	180	166	9.000	5.000	3.000	0,627	al metro
19069200EZ	FO Universal Easy Blow 3x12	Eca	nera	E9/125 G.652.D OS2	12	180	166	9.000	5.000	3.000	0,627	al metro
19021600EZ	FO Universal Easy Blow 4x12	Eca	nera	E9/125 G.652.D OS2	12	180	166	9.000	5.000	3.000	0,627	al metro
19443100EZ	FO Universal Easy Blow 4x12	Eca	nera	G50/125 OM3	12	180	166	9.000	5.000	3.000	0,627	al metro
19021700EZ	FO Universal Easy Blow 5x12	Eca	nera	E9/125 G.652.D OS2	12	180	166	9.000	5.000	3.000	0,627	al metro
19021800EZ	FO Universal Easy Blow 6x12	Eca	nera	E9/125 G.652.D OS2	12,8	195	180	9.000	5.000	3.000	0,698	al metro
19609900EZ	FO Universal Easy Blow 6x12	Eca	nera	G50/125 OM4	12,8	195	180	9.000	5.000	3.000	0,698	al metro
19021900EZ	FO Universal Easy Blow 8x12	Eca	nera	E9/125 G.652.D OS2	14	210	215	9.000	5.000	3.000	0,925	al metro
19022000EZ	FO Universal Easy Blow 10x12	Eca	nera	E9/125 G.652.D OS2	15,4	230	250	9.000	5.000	3.000	1,151	al metro
19022100EZ	FO Universal Easy Blow 12x12	Eca	nera	E9/125 G.652.D OS2	16,9	255	297	9.000	5.000	3.000	1,367	al metro
19170100EZ	FO Universal Easy Blow 12x24	Eca	nera	E9/125 G.652.D OS2	18,8	285	358	9.000	5.000	3.000	1,435	al metro

