


FO Indoor ZGGFR / J-B(ZN)BH

5.9 mm, up to 12F, LS0H, Euroclass B2ca

metal-free, dry interstices, gel-free loose tube,
rodent protection, flame retardant

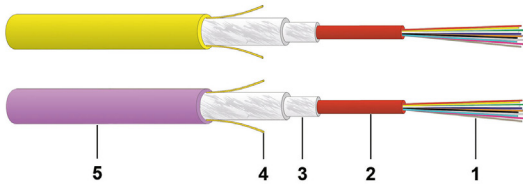

- 1 ≤ 12 fibres
- 2 Loose tube
- 3 Glass armour
- 4 Ripcord
- 5 FR/LS0H sheath



Description

Robust, non-metallic fibre optic indoor cable with one central loose-tube.
High crush resistance for high transmission reliability.
Easy handling due to cable construction with dry interstices and gel-free loose tube.
Non-metallic rodent protection.
The two coloured ripcords are easy to identify and enable the safe opening of the cable sheath.
Flame retardant halogen-free FR/LS0H sheath.

Applicazione

LAN backbone, access and riser zone.
Data centre backbone and horizontal cabling.
Connection cable between the building distributors and/or floor distributors.
Suitable for laying in dry cable trays, ducts and vertical shafts, also when accessible to rodents.
Can also be installed on very complex cable trays.

Costruzione

Outer sheath material	FRNC/LSZH
-----------------------	-----------

Proprietà generali

Impronta	DATWYLER «cable type» «Datwyler designation» «DIN designation» «no. of fibres» «fibre type» «add. text» «batch no.» «meter marks»
Installation temperature	-10 °C - +50 °C
Integrità del circuito	No
Operating temperature	-25 °C - +70 °C
Storage temperature	-25 °C - +70 °C

Standards

Tensile performance	IEC 60794-1-21 E1
Crush resistance	IEC 60794-1-21 E3A
Impact	IEC 60794-1-21 E4
Repeated bending	IEC 60794-1-21 E6
Torsion	IEC 60794-1-21 E7
Reaction to fire (Euroclasses)	EN 13501-6: B2 _{ca}
Zero halogen no corrosive gases	IEC 60754-1/-2, EN 60754-1/-2, VDE 0482-754-1/-2
Flame Propagation	EN 60332-1-2, IEC 60332-1-2, VDE 0482-332-1-2
Smoke Density	IEC 61034-1/-2, EN 61034-1/-2, VDE 0482-1034-1/-2

Versions

Numero Materiale	Product	Reaction To Fire	Outer sheath colour	Fibre type	Diametro esterno della guaina [mm]	Raggio di curvatura [mm]	Weight [kg\km]	Tensile load short term [N]	Tensile load continuous [N]	Crush resistance short term [N]	Crush resistance continuous [N]	Fire load [kWh\m]	Packing unit
19603100BZ	FO Indoor 1x4	B2ca-s1a,d1,a1	giallo	E9/125 G.652.D BLO	5,9	120	42	3.000	1.000	4.000	1.200	0,065	al metro
19603300BZ	FO Indoor 1x4	B2ca-s1a,d1,a1	turchese	G50/125 OM3	5,9	120	42	3.000	1.000	4.000	1.200	0,065	al metro
19603600BZ	FO Indoor 1x4	B2ca-s1a,d1,a1	heather violet	G50/125 OM4	5,9	120	42	3.000	1.000	4.000	1.200	0,065	al metro
19605700BZ	FO Indoor 1x6	B2ca-s1a,d1,a1	giallo	E9/125 G.652.D BLO	5,9	120	42	3.000	1.000	4.000	1.200	0,065	al metro
19605800BZ	FO Indoor 1x6	B2ca-s1a,d1,a1	turchese	G50/125 OM3	5,9	120	42	3.000	1.000	4.000	1.200	0,065	al metro
19605900BZ	FO Indoor 1x6	B2ca-s1a,d1,a1	heather violet	G50/125 OM4	5,9	120	42	3.000	1.000	4.000	1.200	0,065	al metro
19603200BZ	FO Indoor 1x8	B2ca-s1a,d1,a1	giallo	E9/125 G.652.D BLO	5,9	120	42	3.000	1.000	4.000	1.200	0,065	al metro
19603400BZ	FO Indoor 1x8	B2ca-s1a,d1,a1	turchese	G50/125 OM3	5,9	120	42	3.000	1.000	4.000	1.200	0,065	al metro
19603700BZ	FO Indoor 1x8	B2ca-s1a,d1,a1	heather violet	G50/125 OM4	5,9	120	42	3.000	1.000	4.000	1.200	0,065	al metro
19456300BZ	FO Indoor 1x12	B2ca-s1a,d1,a1	giallo	E9/125 G.652.D BLO	5,9	120	42	3.000	1.000	4.000	1.200	0,065	al metro
19603500BZ	FO Indoor 1x12	B2ca-s1a,d1,a1	turchese	G50/125 OM3	5,9	120	42	3.000	1.000	4.000	1.200	0,065	al metro
19597400BZ	FO Indoor 1x12	B2ca-s1a,d1,a1	heather violet	G50/125 OM4	5,9	120	42	3.000	1.000	4.000	1.200	0,065	al metro