


## FO patch panel OV-S

19"/1U, Breakout box OV-S, E9/125 OS2, with labeling strip with adapters

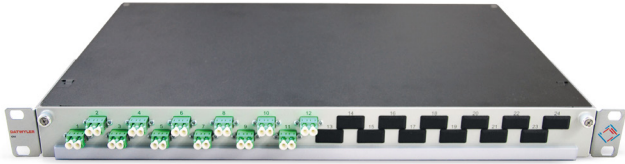

Breakout box OV-S, 19"/1U, extractable, configuration example with 12 LCD adapters

### Description

For the termination of pre-assembled fibre optic cables - maximum of 96 fibres. Loaded with a maximum of 12 / 24 FO adapters.

### Proprietà generali

|                        |  |
|------------------------|--|
| Alloggiamento          | metal sheet, black, extractable drawer with locking mechanism, box allows for depth-adjustable mounting (5 steps, maximum 50 mm) |
| Capacità               | up to 96 fibres  |
| Dimensioni             | 19"/1U   |
| Impronta               | numbers (silk screen printing) on frontplate   |
| Ingresso cavi          | rear left and right with pre-stamped cable entries M15, M20 and M25 - these pre-stamped holes can be opened as necessary         |
| Piastra frontale       | similar to RAL 7035, similar to RAL 9005 or stainless steel  |
| Scarico della trazione | with cable tie and screwed cable gland (M20)   |

### Proprietà ottiche

|                    |            |
|--------------------|------------|
| Tipologia di fibra | E9/125 OS2 |
|--------------------|------------|

### Proprietà meccaniche

|            |  |
|------------|--|
| Adattatore | SCD, LCD, LCQ, LSH Coloured Polymer housings or ST metal housings, ceramic sleeves |
|------------|--|

### Scope of delivery

Breakout box with  
 - two straight cable entries  
 - FO adapters, fastened by screws  
 - labelling strip, 410 mm

### Versions

| Numero Materiale | Product                       | Colour (Front-plate) | Number of adapters | Adapter | Colour (Adapter) | Orientamento adattatore | Dimensioni esterne | Classe della fibra | Peso [kg] | Packing unit |
|------------------|-------------------------------|----------------------|--------------------|---------|------------------|-------------------------|--------------------|--------------------|-----------|--------------|
| 41542301ZY       | Breakout box OV-S 6xLCD, OS2  | nera                 | 6                  | LCD     | blu              | offset horizontal       | 1 U, x 19 in       | OS2                | 2,6 kg    | 1 pc.        |
| 41525001ZY       | Breakout box OV-S 6xLCD, OS2  | grigio chiaro        | 6                  | LCD     | blu              | offset horizontal       | 1 U, x 19 in       | OS2                | 2,6 kg    | 1 pc.        |
| 41542401ZY       | Breakout box OV-S 12xLCD, OS2 | nera                 | 12                 | LCD     | blu              | offset horizontal       | 1 U, x 19 in       | OS2                | 2,6 kg    | 1 pc.        |

| Numero Materiale | Product                              | Colour (Front-plate) | Number of adapters | Adapter   | Colour (Adapter) | Orientamento adattatore | Dimensioni esterne | Classe della fibra | Peso [kg] | Packing unit |
|------------------|--------------------------------------|----------------------|--------------------|-----------|------------------|-------------------------|--------------------|--------------------|-----------|--------------|
| 41525401ZY       | Breakout box OV-S 12xLCD, OS2        | grigio chiaro        | 12                 | LCD       | blu              | offset horizontal       | 1 U, x 19 in       | OS2                | 2,6 kg    | 1 pc.        |
| 41524201ZY       | Breakout box OV-S 24xLCD, OS2        | nera                 | 24                 | LCD       | blu              | offset horizontal       | 1 U, x 19 in       | OS2                | 2,6 kg    | 1 pc.        |
| 41525801ZY       | Breakout box OV-S 24xLCD, OS2        | grigio chiaro        | 24                 | LCD       | blu              | offset horizontal       | 1 U, x 19 in       | OS2                | 2,6 kg    | 1 pc.        |
| 41545901ZY       | Breakout box OV-S 6xLCD/ APC, OS2    | nera                 | 6                  | LCD/APC   | verde            | offset horizontal       | 1 U, x 19 in       | OS2                | 2,6 kg    | 1 pc.        |
| 41544401ZY       | Breakout box OV-S 6xLCD/ APC, OS2    | grigio chiaro        | 6                  | LCD/APC   | verde            | offset horizontal       | 1 U, x 19 in       | OS2                | 2,6 kg    | 1 pc.        |
| 41545801ZY       | Breakout box OV-S 12xLCD/ APC, OS2   | nera                 | 12                 | LCD/APC   | verde            | offset horizontal       | 1 U, x 19 in       | OS2                | 2,8 kg    | 1 pc.        |
| 41544501ZY       | Breakout box OV-S 12xLCD/ APC, OS2   | grigio chiaro        | 12                 | LCD/APC   | verde            | offset horizontal       | 1 U, x 19 in       | OS2                | 2,6 kg    | 1 pc.        |
| 41512501ZY       | Breakout box OV-S 24xLCD/ APC, OS2   | nera                 | 24                 | LCD/APC   | verde            | offset horizontal       | 1 U, x 19 in       | OS2                | 2,8 kg    | 1 pc.        |
| 41511901ZY       | Breakout box OV-S 24xLCD/ APC, OS2   | grigio chiaro        | 24                 | LCD/APC   | verde            | offset horizontal       | 1 U, x 19 in       | OS2                | 2,6 kg    | 1 pc.        |
| 41543701ZY       | Breakout box OV-S 6xLSH/ APC, OS2    | nera                 | 6                  | LSH/APC   | verde            | vertical                | 1 U, x 19 in       | OS2                | 2,3 kg    | 1 pc.        |
| 41531901ZY       | Breakout box OV-S 6xLSH/ APC, OS2    | grigio chiaro        | 6                  | LSH/APC   | verde            | vertical                | 1 U, x 19 in       | OS2                | 2,3 kg    | 1 pc.        |
| 41543801ZY       | Breakout box OV-S 12xLSH/ APC, OS2   | nera                 | 12                 | LSH/APC   | verde            | vertical                | 1 U, x 19 in       | OS2                | 2,6 kg    | 1 pc.        |
| 41532101ZY       | Breakout box OV-S 12xLSH/ APC, OS2   | grigio chiaro        | 12                 | LSH/APC   | verde            | vertical                | 1 U, x 19 in       | OS2                | 2,6 kg    | 1 pc.        |
| 41543901ZY       | Breakout box OV-S 24xLSH/ APC, OS2   | nera                 | 24                 | LSH/APC   | verde            | vertical                | 1 U, x 19 in       | OS2                | 2,7 kg    | 1 pc.        |
| 41532301ZY       | Breakout box OV-S 24xLSH/ APC, OS2   | grigio chiaro        | 24                 | LSH/APC   | verde            | vertical                | 1 U, x 19 in       | OS2                | 3,2 kg    | 1 pc.        |
| 41511801ZY       | Breakout box OV-S 24xLSH-C/ APC, OS2 | grigio chiaro        | 24                 | LSH-C/APC | verde            | vertical                | 1 U, x 19 in       | OS2                | 2,7 kg    | 1 pc.        |

Variants on request.

Con riserva di modifiche tecniche

A partire da 2021-07-05 08:28:49